# **Works Approval**

Works approval number W6835/2023/1

Works approval holder Talison Lithium Australia Pty Ltd

Registered business address

Level 15, 216 St Georges Terrace

Perth, WA 6000

DWER file number DER2023/000552~1

**Duration** 21/11/2023 to 20/11/2026

**Date of issue** 21/11/2023

Premises details Old Mill Road Workers Camp

75 Old Mill Road, North Greenbushes, WA, 6005

Legal description -

Part of Lot 3 on Deposited Plan 21157 Certificate of Title Volume 2076 Folio 826

As depicted in Schedule 1

Prescribed premises category description (Schedule 1, <i>Environmental Protection Regulations 1987</i> )	Assessed production capacity
Category 85: Sewage facility: premises —	45 m <sup>3</sup> per day
(a) on which sewage is treated (excluding septic tanks); or	
(b) from which treated sewage is discharged onto land or into waters.	

This works approval is granted to the works approval holder, subject to the attached conditions, on 21 November 2023, by:

### MANAGER, PROCESS INDUSTRIES

an officer delegated under section 20 of the Environmental Protection Act 1986 (WA)

## Works approval history

Date	Reference number	Summary of changes
21/11/2023	W6835/2023/1	Works approval granted.

## Interpretation

In this works approval:

- the words 'including', 'includes' and 'include' in conditions mean "including but not limited to", and similar, as appropriate;
- (b) where any word or phrase is given a defined meaning, any other part of speech or other grammatical form of that word or phrase has a corresponding meaning;
- (c) where tables are used in a condition, each row in a table constitutes a separate condition;
- (d) any reference to an Australian or other standard, guideline, or code of practice in this works approval:
  - (i) if dated, refers to that particular version; and
  - (ii) if not dated, refers to the latest version and therefore may be subject to change over time;
- (e) unless specified otherwise, any reference to a section of an Act refers to that section of the EP Act; and
- (f) unless specified otherwise, all definitions are in accordance with the EP Act.

**NOTE:** This works approval requires specific conditions to be met but does not provide any implied authorisation for other emissions, discharges, or activities not specified in this works approval.

## Works approval conditions

## **Construction phase**

### Infrastructure and equipment

- **1.** The works approval holder must:
  - (a) install the infrastructure and/or equipment;
  - (b) in accordance with the corresponding installation requirements; and
  - (c) at the corresponding infrastructure location; as specified in Table 1.

**Table 1: Infrastructure and equipment requirements** 

	Infrastructure	Design and construction / installation requirements	Infrastructure location
1.	Wastewater Treatment Plant (WWTP)	<ul> <li>(a) WWTP to be an aerobic treatment unit (ATU), consisting of seven tank modules;</li> <li>(i) Anaerobic chamber with two raw sewerage flow balance tanks capable of storing a total of 45 m³ per day of untreated wastewater;</li> <li>(ii) Aerobic chamber with two tanks (combined 55kL);</li> <li>(iii) Clarification chamber with one tank (16kL);</li> <li>(iv) Disinfection chamber with one tank (6.9kL);</li> <li>(v) Pump out chamber with one tank (1.3kL);</li> <li>(b) Above ground infrastructure located on a hardstand within an earthen bund;</li> <li>(c) WWTP able to treat up to 45 m³ of sewage per day;</li> <li>(d) WWTP able to treat sewage to the following discharge limits: <ol> <li>(i) 5-day Biochemical Oxygen Demand (BOD₅) &lt;20 mg/L</li> <li>(ii) Total suspended solids (Total suspended solids) &lt;30 mg/L</li> <li>(iii) Total phosphorus &lt;8 mg/L</li> <li>(v) Thermotolerant coliforms ≤10 colony forming units (CFU)/100 ml</li> <li>(vi) Residual free chlorine 0.2-2.0 mg/L</li> </ol> </li> <li>(e) Flow meters installed to monitor volumes received at the inlet to WWTP and discharged to the irrigation sprayfield; and</li> <li>(f) Alarm system installed to notify the operator of         (i) pump fails;</li> </ul>	Figures 1 and 2 of Schedule 1.
		(ii) high tank levels; and tank overflows.	
2.	Irrigation spray field	The irrigation field must be designed and constructed to meet the following specifications:  (a) Minimum 1.4 ha irrigation spray field with above	Figure 1 of Schedule 1
		ground sprinkler units; (b) Low trajectory large droplet impact sprinklers to be	

	Infrastructure	Design and construction / installation requirements	Infrastructure location
		installed to discharged treated wastewater;	
		(c) Fenced with a vehicle access gate; and	
		(d) Warning signage fixed to all sides of the fence advising the area is used for the disposal of treated wastewater.	
3.	All infrastructure and equipment	<ul> <li>(a) All sewage storage and treatment tanks, vessels, pipework, fittings, and joints are to be constructed of impervious material and free from leaks and/or defects;</li> </ul>	Figures 1 and 2 of Schedule 1
		(b) All sewage storage and treatment tanks, vessels, pipework, fittings, and joins must be designed and constructed to ensure that stormwater does not enter the sewage treatment system and treated wastewater storage infrastructure; and	
		(c) All pipework, fittings and pumps must be hydraulically tested to the required pressure and visually inspected for any defects to ensure infrastructure is fit for purpose prior to use.	

### **Compliance reporting**

- 2. The works approval holder must within 30 calendar days of an item of infrastructure or equipment required by condition 1 being constructed and/or installed:
  - (a) undertake an audit of their compliance with the requirements of condition 1; and
  - (b) prepare and submit to the CEO an Environmental Compliance Report on that compliance.
- **3.** The Environmental Compliance Report required by condition 2, must include as a minimum the following:
  - (a) certification by a suitably qualified, competent engineer that the items of infrastructure and components thereof, as specified in condition 1, have been constructed in accordance with the relevant requirements specified in condition 1;
  - (b) as constructed plans and a detailed site plan for each item of infrastructure or component of infrastructure specified in condition 1; and
  - (c) be signed by a person authorised to represent the works approval holder and contains the printed name and position of that person.

## **Environmental commissioning phase**

#### **Environmental commissioning requirements and emission limits**

4. The works approval holder may only commence environmental commissioning of an item of infrastructure listed in condition 1 once the Environmental Compliance Report has been submitted for that item of infrastructure in accordance with conditions 2 and 3 of this works approval.

- **5.** The works approval holder must ensure that environmental commissioning activities undertaken for an item of infrastructure specified in Table 2 are only be carried out:
  - (a) in accordance with the corresponding commissioning requirements; and
  - (b) for the corresponding authorised commissioning duration. as specified in Table 2.

**Table 2: Environmental commissioning requirements** 

Infrastructure	Commissioning requirements	Authorised commissioning duration
Irrigation sprayfield	<ul> <li>a) No more than 45 m³ of treated effluent is discharged to the irrigation sprayfield per day.</li> <li>b) Irrigation is managed to prevent ponding and pooling of effluent on the ground surface of the irrigation sprayfield.</li> </ul>	A period not exceeding 90 calendar days in aggregate.
WWTP and pipeline	Treated effluent that meets design specifications listed in condition 1 may be disposed of to the irrigation field;	
	<ul> <li>b) Treated effluent that does not meet design specifications listed in condition 1 is to be:</li> </ul>	
	<ul> <li>removed by a licensed Controlled Waste Carrier for disposal to a premises authorised by the department to accept the waste; or</li> </ul>	
	(ii) re-circulated back through the WWTP;	
	<ul> <li>volumetric flow meters are maintained on the WWTP inlet and outlet to the irrigation sprayfield.</li> </ul>	
	<ul> <li>Earthen bunding is maintained around the WWTP perimeter.</li> </ul>	
	<ul> <li>Sludge is contained within sealed sludge tanks prior to removal by a licensed waste carrier for disposal to a licensed disposal facility.</li> </ul>	
	f) Chemicals are stored in accordance with Australian Standard AS3780-2008 Storage and Handling of Corrosive Substances.	
	g) In the event of a leak/spill, the source will be isolated, and any contaminated soil remediated or disposed of to an appropriately licensed facility.	

**6.** During environmental commissioning, the works approval holder must ensure that the emission specified in Table 3, is discharged only from the corresponding discharge point(s) and only at the corresponding discharge point location as specified in Table 3.

Table 3: Authorised discharge points during commissioning

Emission	Discharge point	Discharge point location
Treated effluent	a) At the outlet of the WWTP, for removal offsite via a licenced waste contractor;	Irrigation sprayfield as shown in Figure 1 of Schedule 1.

Emission	Discharge point	Discharge point location
	or b) Sprinklers within the irrigation sprayfield.	

### Monitoring during environmental commissioning

7. The works approval holder must monitor emissions during environmental commissioning in accordance with Table 4.

Table 4: Emissions monitoring during environmental commissioning

Discharge point	Monitoring location	Parameter	Frequency	Averaging Period	Unit
Irrigation sprayfield	WWTP outlet	Thermotolerant coliforms	Weekly	Spot sample	cfu or MPN /100 ml
		BOD₅			mg/L
		Total suspended solids			
		Total dissolved solids			
		Total nitrogen			
		Total phosphorus			
		pH <sup>1</sup>	Daily or continuous online		pH units
		Residual chlorine <sup>1</sup>	Daily or continuous online		mg/L
	NATA	Cumulative flow volume discharged to sprayfield <sup>1</sup>	Continuous	N/A	m³/day

Note 1: In-field non-NATA accredited analysis permitted.

- **8.** For the monitoring activity required by condition 7, the works approval holder must:
  - (a) record the results;
  - (b) handle and preserve all water samples collected during the monitoring of the WWTP in accordance with AS 5667.1 and AS 5667.10; and
  - (c) have analysis conducted by a laboratory with current National Association of Testing Authorities (NATA) accreditation for the parameters specified.

## **Environmental Commissioning Report**

9. The works approval holder must submit to the CEO an Environmental Commissioning Report within 30 calendar days of the completion date of environmental commissioning for each item of infrastructure specified in Table 2.

- **10.** The works approval holder must ensure the Environmental Commissioning Report required by condition 9 of this works approval includes the following:
  - (a) a summary of the environmental commissioning activities undertaken, including timeframes and amount of wastewater processed;
  - a summary of treated effluent monitoring results recorded in accordance with condition 7;
  - (c) copies of laboratory reports for treated effluent monitoring results recorded in accordance with condition 7:
  - (d) a summary of the environmental performance of each item of infrastructure or equipment as installed, which at minimum includes:
    - (i) a comparison of the treated effluent monitoring results against discharge limits specified in condition 1;
    - (ii) assessment of the irrigation sprayfield performance against operational requirements in condition 5;
  - (e) a review of the works approval holder's performance and compliance against the conditions of this works approval; and
  - (f) where they have not been met, measures proposed to meet the manufacturer's design specifications and the conditions of this works approval, together with timeframes for implementing the proposed measures.

### Time limited operations phase

#### Commencement and duration

- 11. The works approval holder may only commence time limited operations for an item of infrastructure identified in condition 1 where the Environmental Commissioning Report for that item of infrastructure as required by condition 9 has been submitted by the works approval holder; and
- **12.** The works approval holder may conduct time limited operations for an item of infrastructure specified in condition 13:
  - (a) for a period not exceeding 180 calendar days from the day the works approval holder meets the requirements of condition 11 for that item of infrastructure; or
  - (b) until such time as a registration or licence for that item of infrastructure is granted in accordance with Part V of the *Environmental Protection Act 1986* and only where this occurs prior to the time period specified in sub provision (a).

#### Time limited operations requirements and emission limits

During time limited operations, the works approval holder must ensure that the premises infrastructure and equipment listed in Table 5 and located at the corresponding infrastructure location is maintained and operated in accordance with the corresponding operational requirement set out in Table 5.

Table 5: Infrastructure and equipment requirements during time limited operations

Site infrastructure and equipment	Operational requirements	Infrastructure location
Irrigation sprayfield	<ul> <li>a) No more than 45 m<sup>3</sup> per day of treated effluent is discharged to the irrigation sprayfield.</li> </ul>	Figure 1 of Schedule 1.
	<ul> <li>b) Irrigation is managed to prevent ponding and pooling of effluent on the ground surface of the irrigation sprayfield.</li> </ul>	
WWTP and pipeline	<ul> <li>a) Treated effluent that meets design specifications listed in condition 1 may be disposed of to the irrigation field;</li> </ul>	Figures 1 and 2 of Schedule 1.
	<ul><li>b) Treated effluent that does not meet design specifications listed in condition 1 is to be:</li></ul>	
	<ul> <li>removed by a licensed Controlled Waste Carrier for disposal to a premises authoris by the department to accept the waste; or</li> </ul>	ed
	(ii) re-circulated back through the WWTP;	
	<ul> <li>Volumetric flow meters are maintained on the WWTP inlet and outlet to the irrigation sprayfield</li> </ul>	
	<ul> <li>Earthen bunding is maintained around the WWT perimeter.</li> </ul>	Р
	<ul> <li>e) Sludge is contained within sealed sludge tanks p to removal by a licensed waste carrier for dispos to a licensed disposal facility.</li> </ul>	
	f) Chemicals are stored in accordance with Austral Standard AS3780-2008 Storage and Handling of Corrosive Substances.	
	g) In the event of a leak/spill, the source will be isolated, and any contaminated soil remediated disposed of to an appropriately licensed facility.	or

During time limited operations, the works approval holder must ensure that the emission specified in Table 6 is discharged only from the corresponding discharge points and only at the corresponding discharge point location, as specified in Table 6

Table 6: Authorised discharge points during time limited operations

Emission	Discharge point	Discharge point location
Treated effluent	At the outlet of the WWTP, for removal offsite via a licenced waste contractor; or	Irrigation spray field as shown in Figure 1 of Schedule 1.
	<ul> <li>Sprinklers within the irrigation sprayfield.</li> </ul>	

### Monitoring during time limited operations

**15.** The works approval holder must monitor emissions during time limited operations in accordance with Table 7.

Table 7: Emissions and discharge monitoring during time limited operations

Discharge point	Monitoring location	Parameter	Frequency	Averaging Period	Unit
Irrigation sprayfield	WWTP outlet	Thermotolerant coliforms	Monthly during time limited operations phase	Spot sample	cfu or MPN /100 mL
		BOD <sub>5</sub>			mg/L
		Total suspended solids			
		Total nitrogen			
		Total phosphorus			
		pH <sup>1</sup>			
		Total dissolved solids			
		pH <sup>1</sup>	Daily or continuous	N/A	pH units
		Residual chlorine <sup>1</sup>			mg/L
	NATA S	Cumulative flow volume discharged to sprayfield <sup>1</sup>	Continuous	Daily	m <sup>3/</sup> day

Note 1: In-field non-NATA accredited analysis permitted.

- **16.** For the monitoring activity required by condition 15, the works approval holder must:
  - (a) record the results;
  - (b) handle and preserve all water samples collected during the monitoring of the WWTP in accordance with AS 5667.1 and AS 5667.10; and
  - (c) have analysis conducted by a laboratory with current National Association of Testing Authorities (NATA) accreditation for the parameters specified.

#### **Compliance reporting**

- 17. The works approval holder must submit to the CEO a report on the time limited operations within 30 calendar days of the completion date of time limited operations or 30 calendar days before the expiration date of the works approval, whichever is the sooner.
- **18.** The works approval holder must ensure the report required by condition 17 includes the following:
  - (a) a summary of the time limited operations, including date(s) for commencement of time limited operations, timeframes and amount of wastewater processed;

- (b) a summary of monitoring parameter results obtained during time limited operations under condition 15.
- (c) copies of laboratory reports for treated effluent monitoring results recorded in accordance with condition 15;
- (d) a summary of the environmental performance of each item of infrastructure or equipment as installed, which at minimum includes:
- (e) a comparison of the treated effluent monitoring results against discharge limits specified in condition 1;
- (f) assessment of the spray irrigation field performance against operational requirements in condition 13:
- (g) a review of performance and compliance against the conditions of the works approval and the Environmental Commissioning Report; and
- (h) where the specifications and the conditions of this works approval have not been met, what measures will the works approval holder take to meet them, and what timeframes will be required to implement those measures.

### **Records and reporting (general)**

- 19. The works approval holder must record the following information in relation to complaints received by the works approval holder (whether received directly from a complainant or forwarded to them by the Department or another party) about any alleged emissions from the premises:
  - (a) the name and contact details of the complainant, (if provided);
  - (b) the time and date of the complaint;
  - (c) the complete details of the complaint and any other concerns or other issues raised; and
  - (d) the complete details and dates of any action taken by the works approval holder to investigate or respond to any complaint.
- **20.** The works approval holder must maintain accurate and auditable books including the following records, information, reports, and data required by this works approval:
  - (a) the works conducted in accordance with condition 1;
  - (b) any maintenance of infrastructure that is performed in the course of complying with conditions 5 and 13:
  - (c) monitoring programmes undertaken in accordance with conditions 7 and 15; and
  - (d) complaints received under condition 19.
- **21.** The books specified under condition 20 must:
  - (a) be legible;
  - (b) if amended, be amended in such a way that the original version(s) and any subsequent amendments remain legible and are capable of retrieval;
  - (c) be retained by the works approval holder for the duration of the works approval; and
  - (d) be available to be produced to an inspector or the CEO as required.

## **Definitions**

In this works approval, the terms in Table 8: Definitions have the meanings defined.

**Table 8: Definitions** 

Term	Definition
AS3780-2008	means Australian Standard AS3780-2008 Storage and Handling of Corrosive Substances
AS 5667.1	means Australian Standard 5667.1 Water quality - Sampling
AS 5667.10	means Australian Standard 5667.10 Water quality - Sampling Guidance on sampling of waste waters
BOD <sub>5</sub>	5-day Biochemical Oxygen Demand
books	has the same meaning given to that term under the EP Act.
CEO	means Chief Executive Officer.  CEO for the purposes of notification means:  Director General Department administering the Environmental Protection Act 1986 Locked Bag 10 Joondalup DC WA 6919  info@dwer.wa.gov.au
cfu	colony forming units
condition	means a condition to which this works approval is subject under s.62 of the EP Act.
Department	means the department established under section 35 of the <i>Public Sector Management Act 1994</i> and designated as responsible for the administration of Part V, Division 3 of the EP Act.
discharge	has the same meaning given to that term under the EP Act.
DWER	Department of Water and Environmental Regulation
emission	has the same meaning given to that term under the EP Act.
environmental commissioning	means the sequence of activities to be undertaken to test equipment integrity and operation, or to determine the environmental performance, of equipment and infrastructure to establish or test a steady state operation and confirm design specifications.
Environmental Commissioning Report	means a report on any commissioning activities that have taken place and a demonstration that they have concluded, with focus on emissions and discharges, waste containment, and other environmental factors.
Environmental Compliance Report	means a report to satisfy the CEO that the conditioned infrastructure and equipment has been installed in accordance with the works approval.

Term	Definition
EP Act	means the Environmental Protection Act 1986 (WA).
EP Regulations	means the Environmental Protection Regulations 1987 (WA).
ha	hectare
Inspector	means an inspector appointed by the CEO in accordance with s.88 of the EP Act.
kg	kilogram
m <sup>3</sup>	cubic metres
mg/L	milligrams per litre
ml	Millilitre
MPN	most probable number
NATA	National Association of Testing Authorities
NATA accreditation	means in relation to the analysis of a sample that the laboratory is NATA accredited for the specified analysis at the time of the analysis
premises	refers to the premises to which this works approval applies, as specified at the front of this works approval and as shown on the map in Schedule 1 to this works approval.
prescribed premises	has the same meaning given to that term under the EP Act.
spot sample	means a discrete sample representative at the time and place at which the sample is taken.
suitably qualified, competent engineer	<ul> <li>means a person who:</li> <li>a) holds a Bachelor's degree recognised by Engineers Australia; and</li> <li>b) has a minimum of five years of experience working in a supervisory role in civil, structural, environmental or wastewater engineering; and</li> <li>c) is employed by an independent third party external to the Works Approval Holder's business;</li> <li>or is otherwise approved in writing by the CEO to act in this capacity.</li> </ul>
time limited operations	refers to the operation of the infrastructure and equipment identified under this works approval that is authorised for that purpose, subject to the relevant conditions.
waste	has the same meaning given to that term under the EP Act.

Term	Definition
works approval	refers to this document, which evidences the grant of the works approval by the CEO under s.54 of the EP Act, subject to the conditions.
works approval holder	refers to the occupier of the premises being the person to whom this works approval has been granted, as specified at the front of this works approval.
WWTP	Wastewater Treatment Plant

### **END OF CONDITIONS**

## **Schedule 1: Maps**

## **Premises map**



Figure 1: Map of the boundary of the prescribed premises

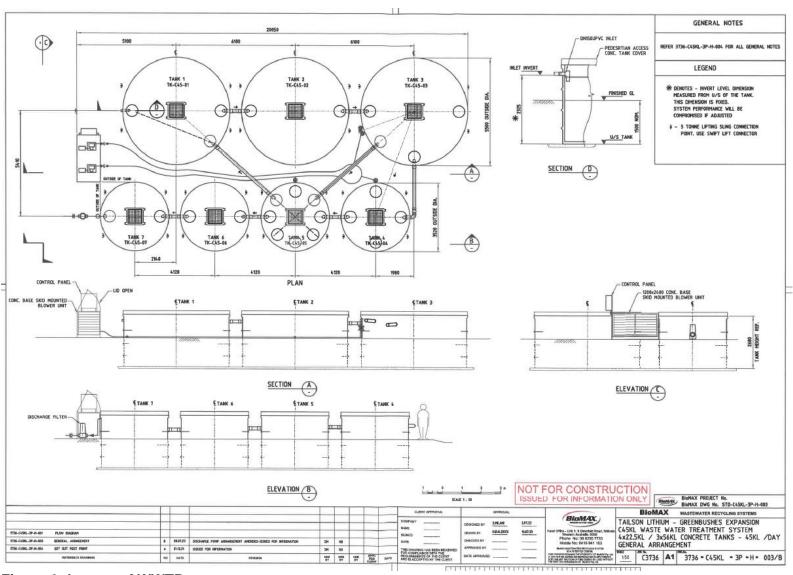


Figure 2: Layout of WWTP